




DESIGN GUIDE

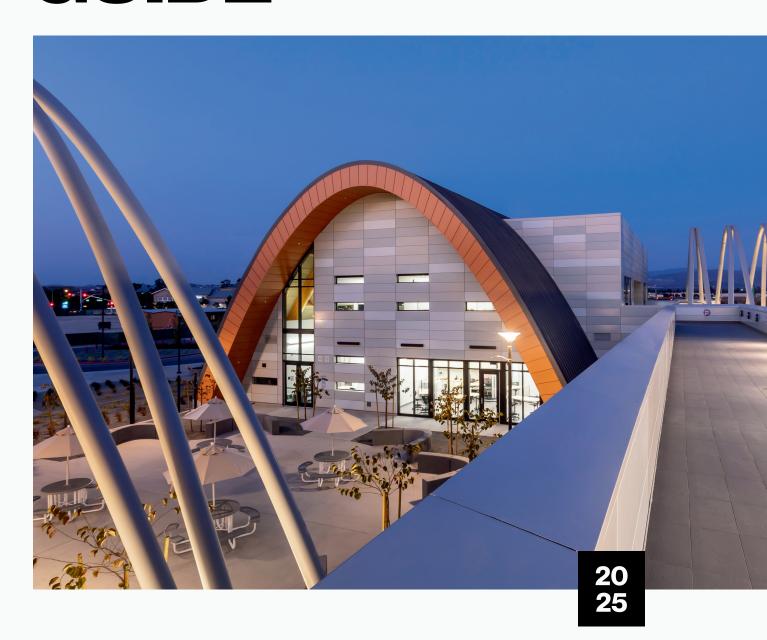

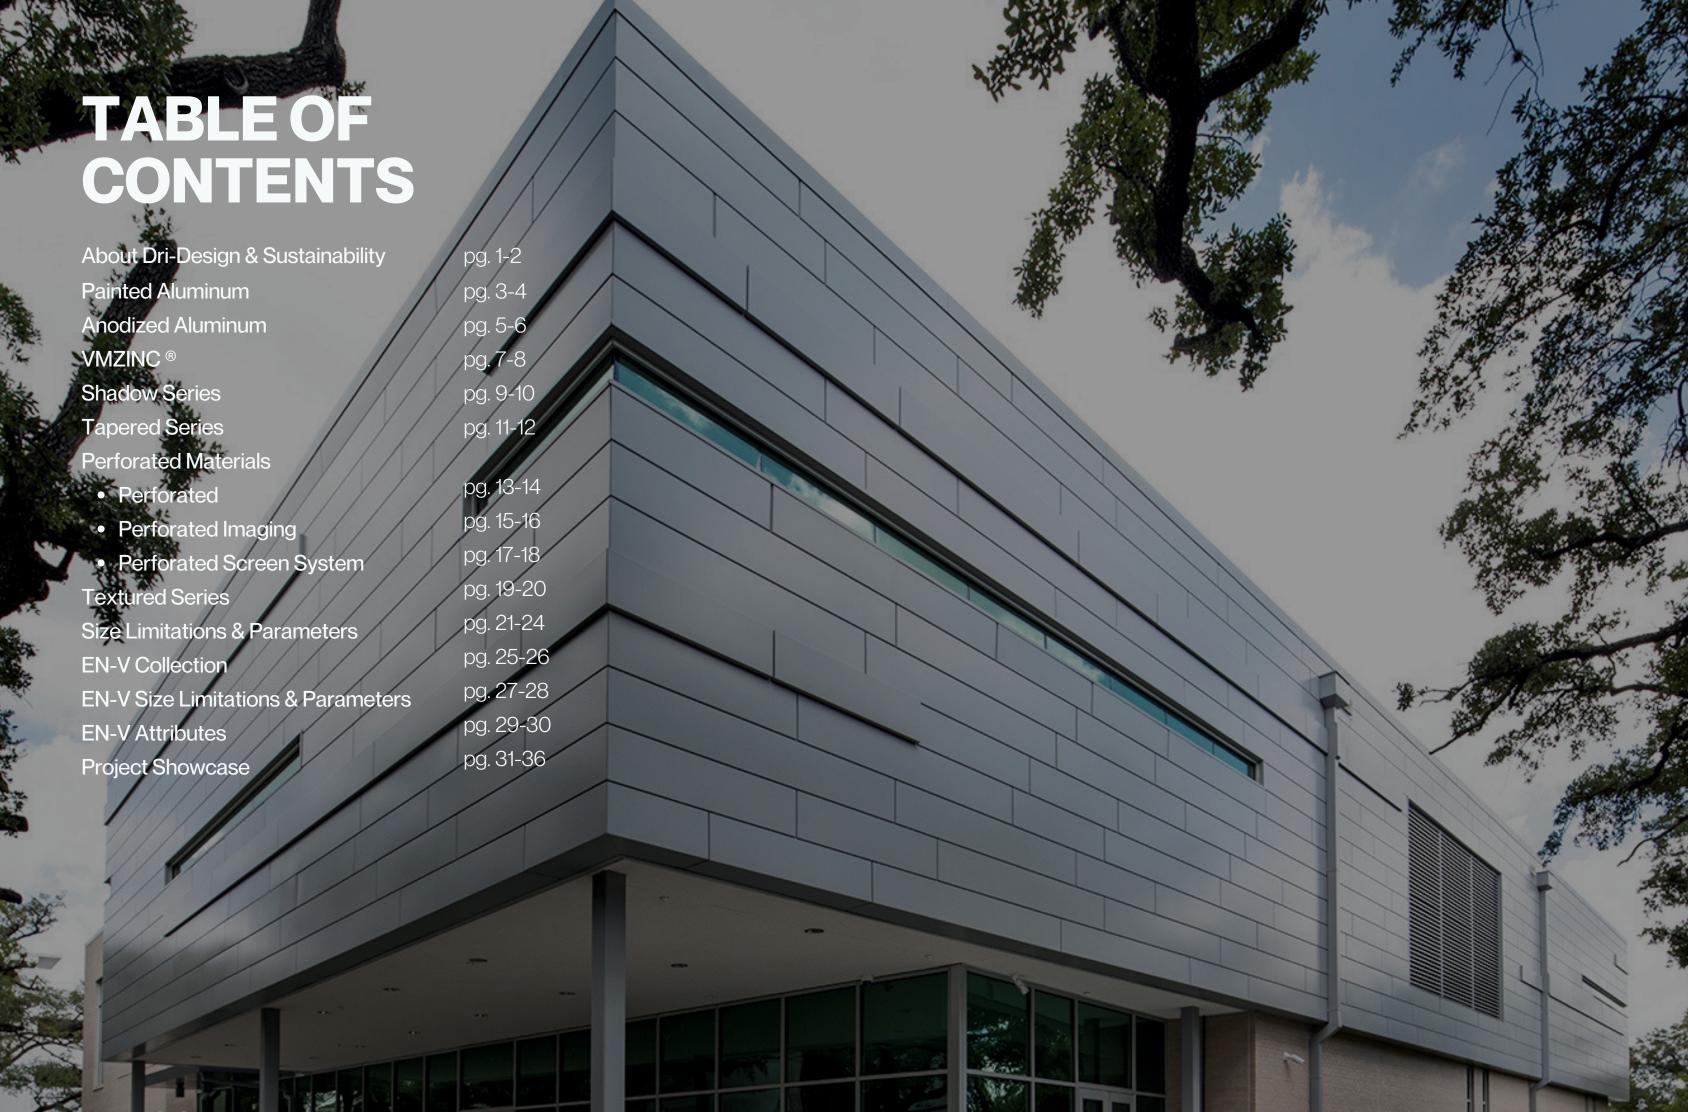

DRI-DESIGN ADVANTAGES

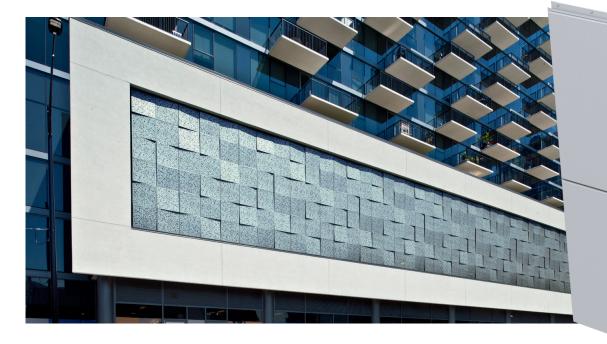

ONE CONTINUOUS METAL PANEL

Our advantage is in the design of our metal panel system.

NO DELAMINATION

Dri-Design panels are NOT laminated, therefore will NOT delaminate, ensuring longlasting structural integrity.

NO **PLASTICS**

Our single-skin technology stands out from ACM competitors by not having a plastic core. This feature contributes to conservation efforts by helping save fossil fuels.

NO SILICONE SEALANTS **OR GASKETS**

Dri-Design eliminates the need for petroleum-based joint sealants or gaskets, ensuring no streaking and saving both fossil fuels and future maintenance costs.

COMBUSTIBLE

Our metal panels are non-combustible and are NFPA 285 compliant.

company regarding NFPA 285 compliant wall design*




*Please consult a technical advisor within our





Our mission is to accelerate a net-zero emissions future-built environment with people and planet at its heart.

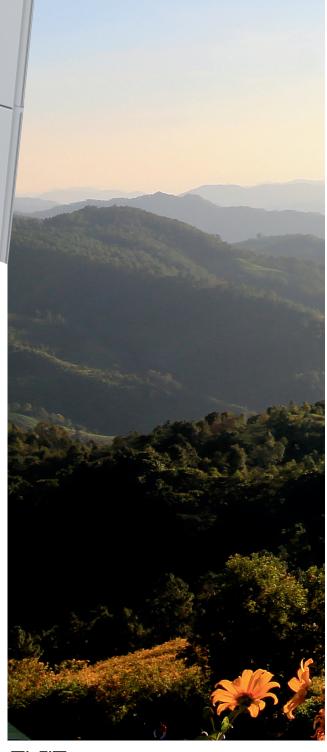



For the latest and most accurate information, please visit our website.



COMMITTED TO SUSTAINABILITY



Reduce our carbon footprint

- Achieve net zero carbon manufacturing by 2030
- 50% reduction in product CO2e intensity from our primary supply partners by 2030
- Zero emission company funded cars by 2025



Increase the use of renewable energy

- 60% direct renewable energy use by 2030
- 20% on-site renewable energy generated by 2030
- Solar PV systems on all wholly owned facilities by



Increase recycling and lower waste

- Zero company waste to landfill by 2030
- 1 billion PET bottles recycled into our manufacturing processes by 2025



Harvest rainwater and support ocean clean-up

- Harvest 100 million liters of rainwater annually by
- Support 5 ocean clean-up projects by 2025



Painted Aluminum


Dri-Design Painted Aluminum Panels offer the ultimate design flexibility for exterior and interior applications. Panels are painted using industry leading Fluoropolymer based paints for long lasting finish durability, while our finishers use a 100% air capture system to destroy the VOCs produced, so there is no adverse environmental impact

Technical Information:

System Depth - 11/4" nominal Material Thickness - 0.080" Aluminum Panel Joints - 1/2" Horizontal, 5/8" Standard *Please consult technical advisor for custom panel joints*

Finish - Fluoropolymer

Finish Warranty - Up to 20 years

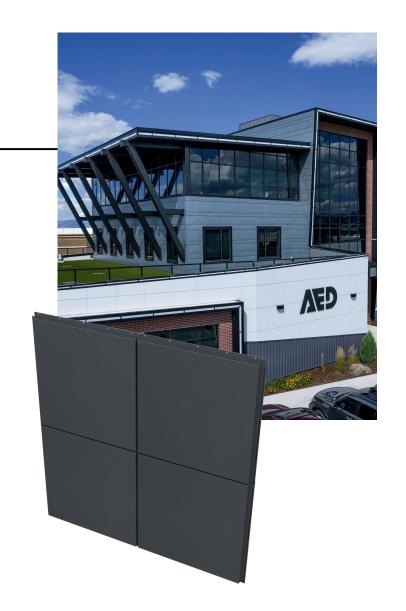



For the latest and most accurate information, please visit our website.

Anodized Aluminum

Anodizing seamlessly blends science and nature, using natural oxidation and electricity to create a stunning finish that enhances the inherent beauty and unique variations of aluminum.

Copper Anodized





VMZINC ®

VMZINC® Series Panels take inspiration from the distinctive tones and textures of nature to create an exclusive, refined and unforgettable visual experience. Our Dri-Design Panels made with VMZINC® are available in QUARTZ-ZINC®, ANTHRA-ZINC®, AZENGAR® and PIGMENTO® Series colors.



System Depth - 11/4" nominal

Material - VMZINC®

Material Thickness - 1mm, 1.5mm

Panel Joints - 1/2" Horizontal, 5/8" Standard

Please consult technical advisor for custom panel joints

Finish - QUARTZ-ZINC®, ANTHRA-ZINC®, AZENGAR® and PIGMENTO® Series

Finish Warranty - 5 year standard (10 year

available)

Weight - Less than 3 pounds per square foot



QUARTZ-ZINC®

PIGMENTO® Green

PIGMENTO® Blue

PIGMENTO® Red

PIGMENTO® Brown

AZENGAR®

Colors shown are represntational only



Shadow Series

Add depth and definition to any architectural design. Individual panels can be extended at varying depths to create texture or a dynamic variation in patterns, all while keeping the substrate and weather barrier in the same plane.

Technical Information:

System Depth - 11/4" - 4" for Aluminum, Stainless Steel, Weathering Steel, 11/4" - 3" VMZINC® & Copper

Material - Aluminum, VMZINC®, Stainless Steel, Weathering Steel, Copper

Material Thickness - .080" Aluminum, 1mm VMZINC®, 1.5mm VMZINC® | 18, 16 GA Stainless Steel & Weathering Steel | 36, 48 Ounces Copper

Panel Joints - 1/2" Horizontal, 5/8" Standard

Please consult technical advisor for custom panel joints

Finish - Available finishes based on material

Weight - Varies based on material type





Tapered Series

Angle in any direction with varying depths and slopes. This design flexibility empowers you to create a dynamic and unique surface on almost any façade, all without the necessity to modify the substrate or compromise the integrity of the weather barrier.

Technical Information:

System Depth - 11/4" - 4" for Aluminum, Stainless Steel, Weathering Steel, 11/4" - 3" VMZINC® & Copper

Material - Aluminum, VMZINC®, Stainless Steel, Weathering Steel, Copper

Material Thickness - .080" Aluminum, 1mm VMZINC®, 1.5mm VMZINC® | 18, 16 GA Stainless Steel & Weathering Steel | 36, 48 Ounces Copper

Panel Joints - 1/2" Horizontal, 5/8" Standard

Please consult technical advisor for custom panel joints


Finish - Available finishes based on material


Weight - Varies based on material type



For the latest and most accurate information, please visit our website.



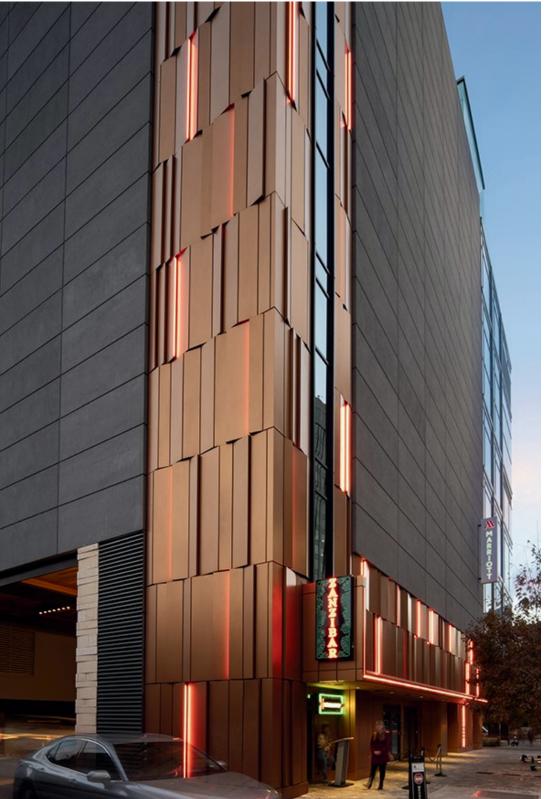

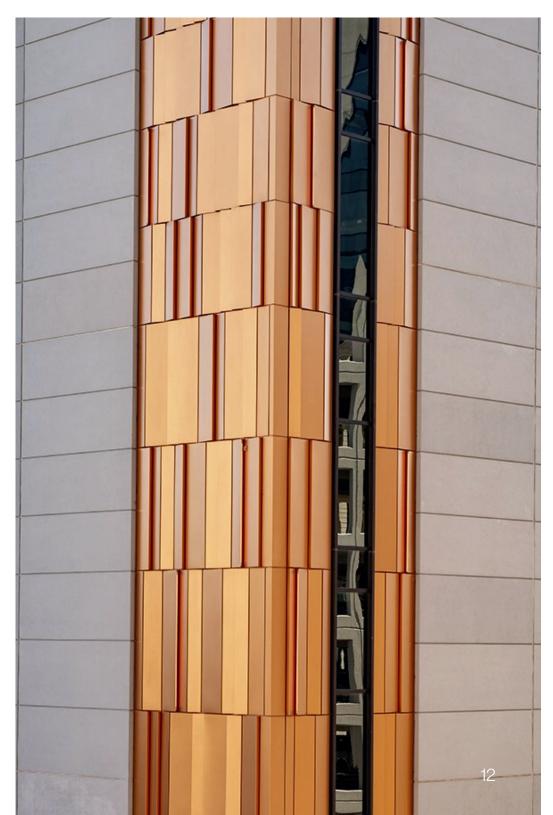

Perforated

Technical Information: **System Depth** - 11/4" - 4" for Aluminum, Stainless Steel, Weathering Steel, 11/4" - 3" VMZINC® & Copper

Material - Aluminum, VMZINC®, Copper and Stainless Steel

Material Thickness - ..125" GA Aluminum, 18,16 GA Weathering Steel &

Stainless Steel

Consult technical advisor requirements for other available material & thicknesses

Panel Joints - 1/2" Horizontal Standard

(up to 1") 5/8" Vertical Standard (1/8" - 1") Finish - Available in all Dri-Design finishes

Weight - Varies based on material type

An impressive blend of practicality and visual appeal, the Perforated Panel Series seamlessly delivers essential airflow and/or shade to structures without compromising on style or design. These panels can be customized with virtually any shape and pattern, making them versatile for a wide range of







Perforated Imaging

Dri-Design utilizes state-of-the-art computer-based manufacturing techniques alongside Perforated Imaging to intricately craft images through perforations. Through meticulous control of perforation size, placement, and density, we skillfully generate custom images, creating dynamic interplays of light, dark, and shades in between.

Technical Information:

System Depth - 11/4"-4" nominal (including Tapered and Shadow)

Material - Aluminum, VMZINC®, Copper, Stainless Steel,

Weathering Steel

Material Thickness - .125" GA Aluminum, 18,16 GA Weathering

Steel & Stainless Steel


Panel Joints - 1/2" Horizontal, 5/8" Standard

Please consult technical advisor for custom panel joints

Finish - Available finishes based on material

Weight - Varies based on material type



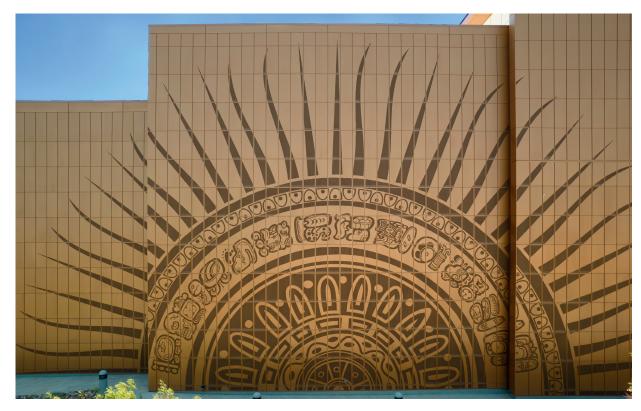




Perforated Screen System

Introducing our latest perforated screen system panels, now available in larger module sizes for enhanced design flexibility.

Choose from dimensions of up to 48" x 126" or 126" x 48", crafted from high-quality .125" gauge aluminum. These panels offer a selection of premium finishes, including anodized or painted with a fluoropolymer finish, allowing you to achieve a world-class aesthetic for your projects.

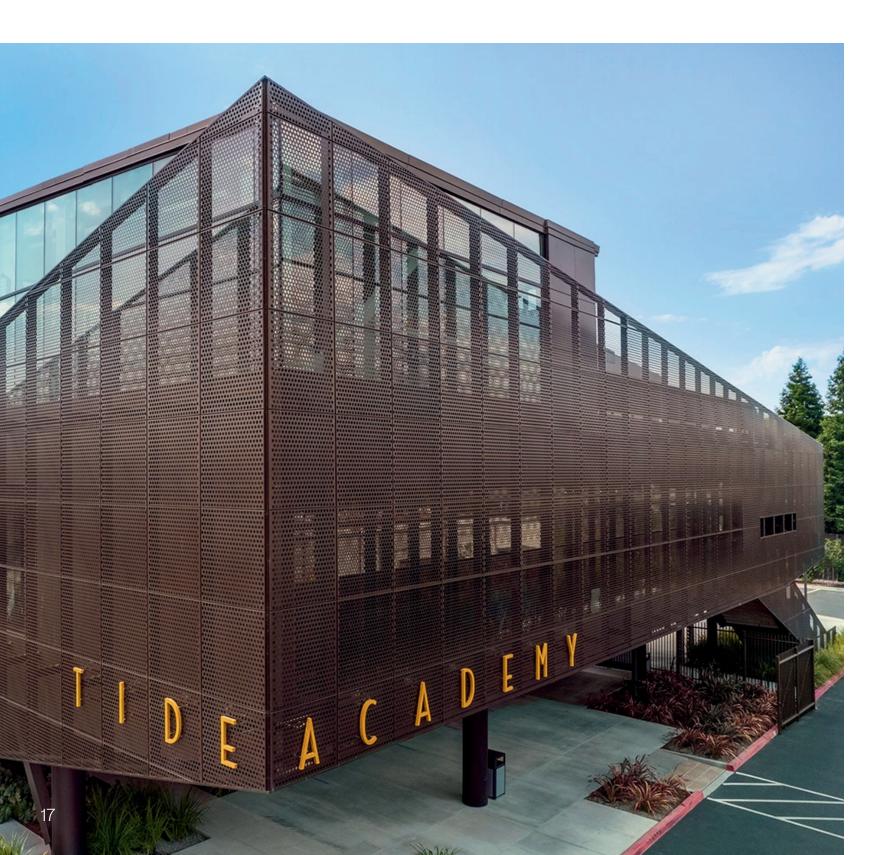


Technical Information:

System Depth - 1.5" depth standard

Material - Aluminum

Material Thickness - .125" GA Panel Joints - Minimum 1/8" joint

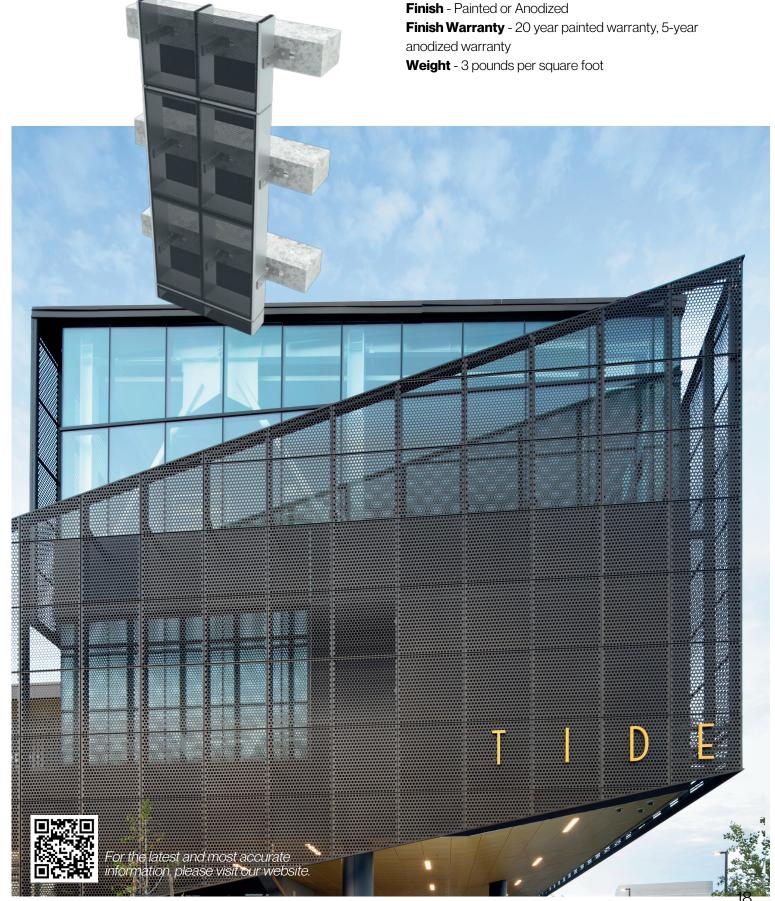

Textured Series

Evoke a distinct visual ambiance with our Textured Panel System. Each corrugated panel, featuring perforations, is securely attached to a Dri-Design wall panel, arriving at your job site fully prepared for installation. Enjoy complete creative freedom by selecting your preferred pattern and finish, allowing you to envision and realize your design aspirations.



System Depth - 6" depth standard


Material - Aluminum

Material Thickness - .080"


Panel Joints - 1/2" Horizontal, 5/8" Standard *Please consult technical advisor for custom panel joints*


Finish - Available finishes based on material

Weight - <5 pounds per square foot

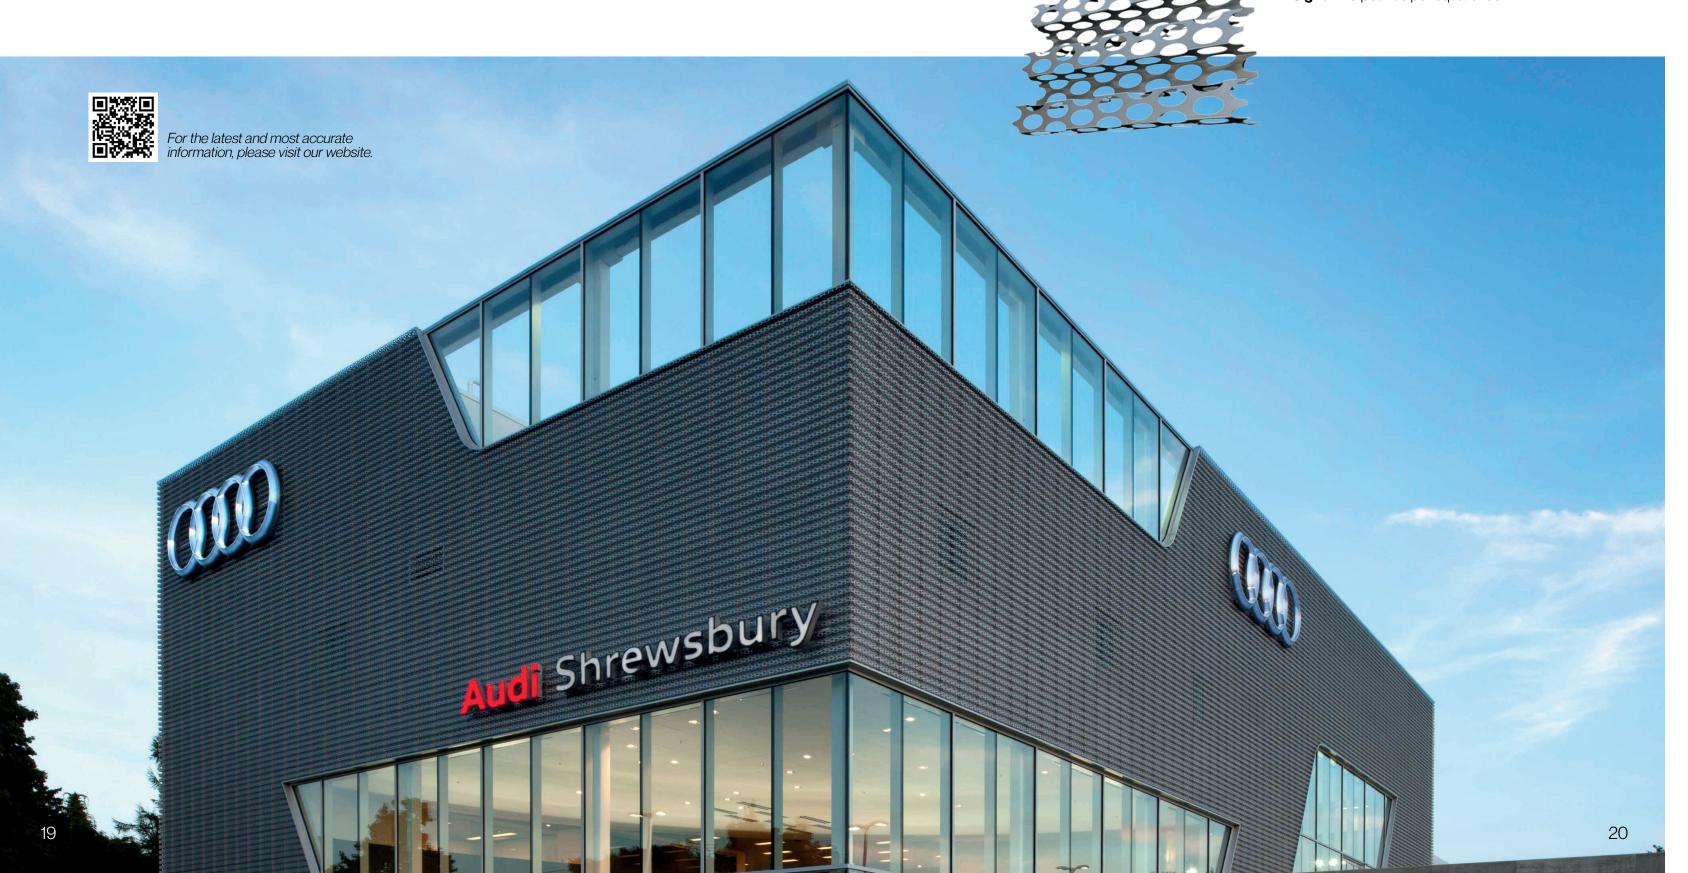

Size Limitations & Parameters: .080", .125"

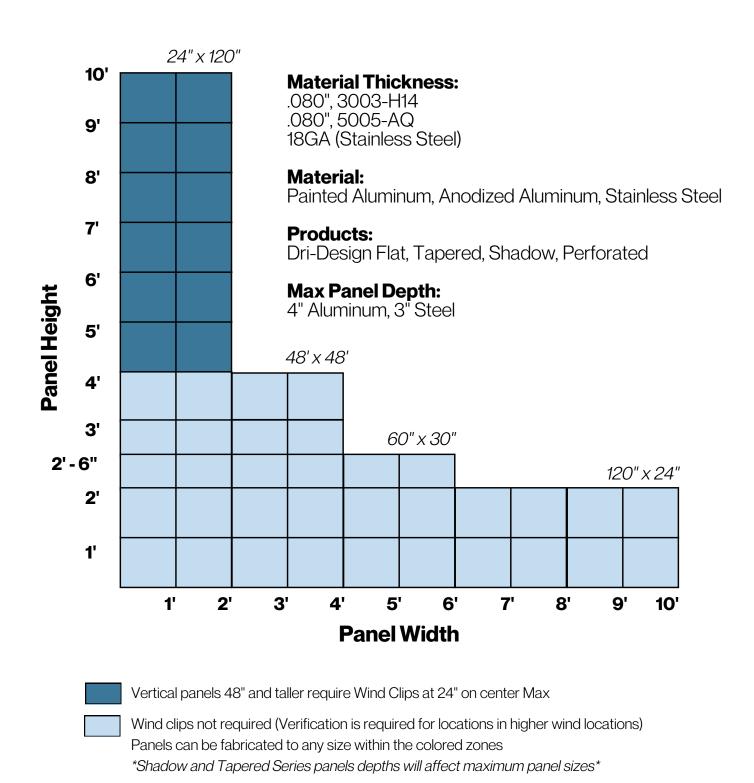

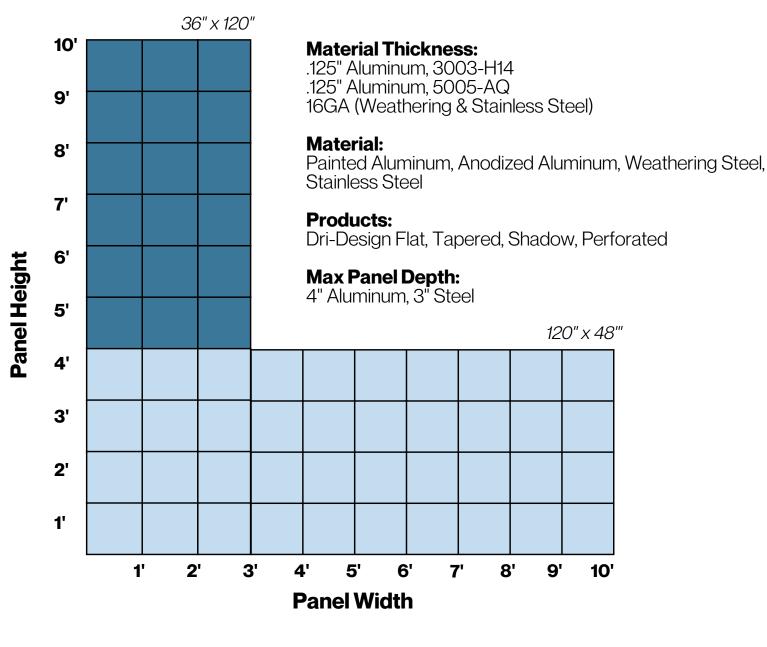


Vertical panels 48" and taller require Wind Clips at 24" on center Max


Wind clips not required (Verification is required for locations in higher wind locations)

Panels can be fabricated to any size within the colored zones

Shadow and Tapered Series panels depths will affect maximum panel sizes

Size Limitations & Parameters: 1.0mm, 1.5mm VMZINC ®

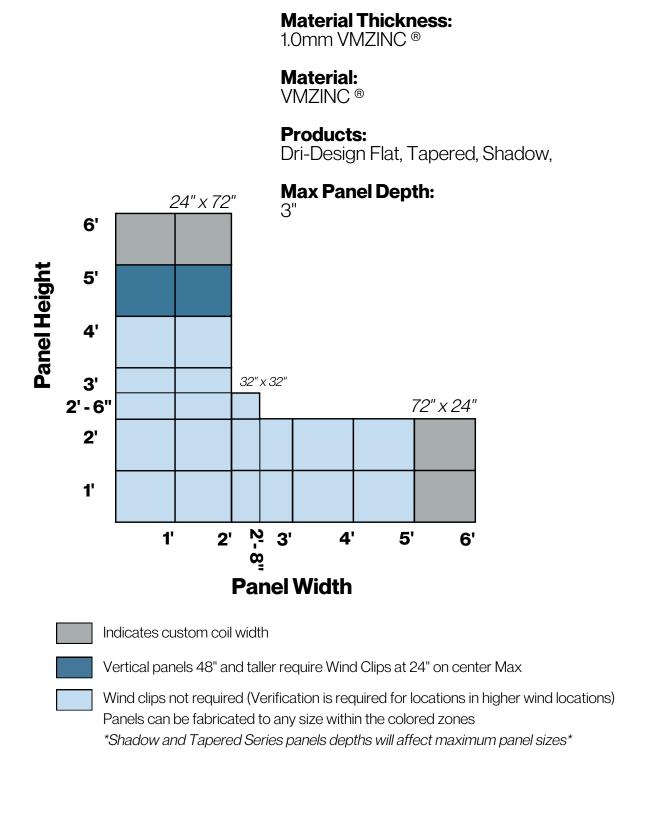

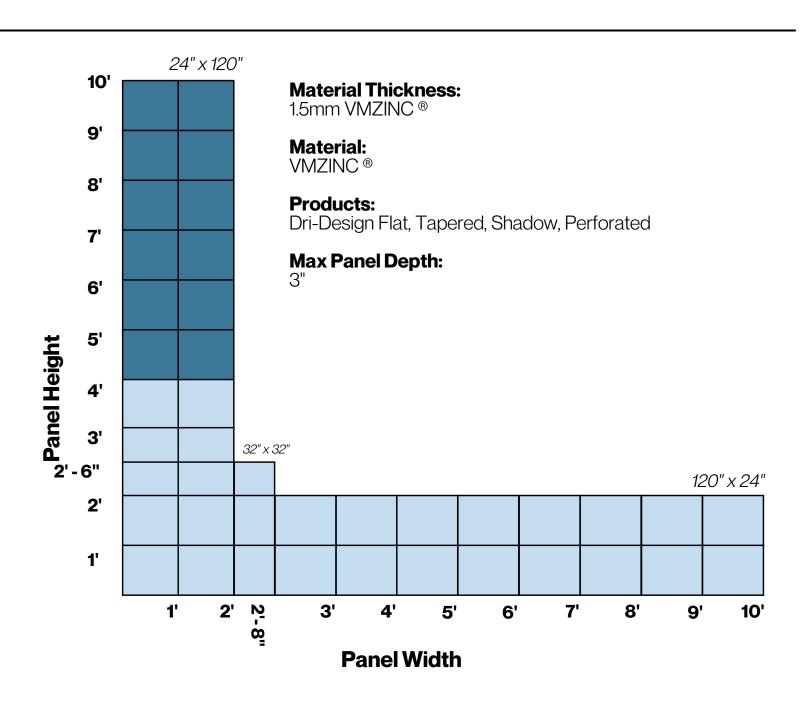


Vertical panels 48" and taller require Wind Clips at 24" on center Max

Wind clips not required (Verification is required for locations in higher wind locations)

Panels can be fabricated to any size within the colored zones


Shadow and Tapered Series panels depths will affect maximum panel sizes

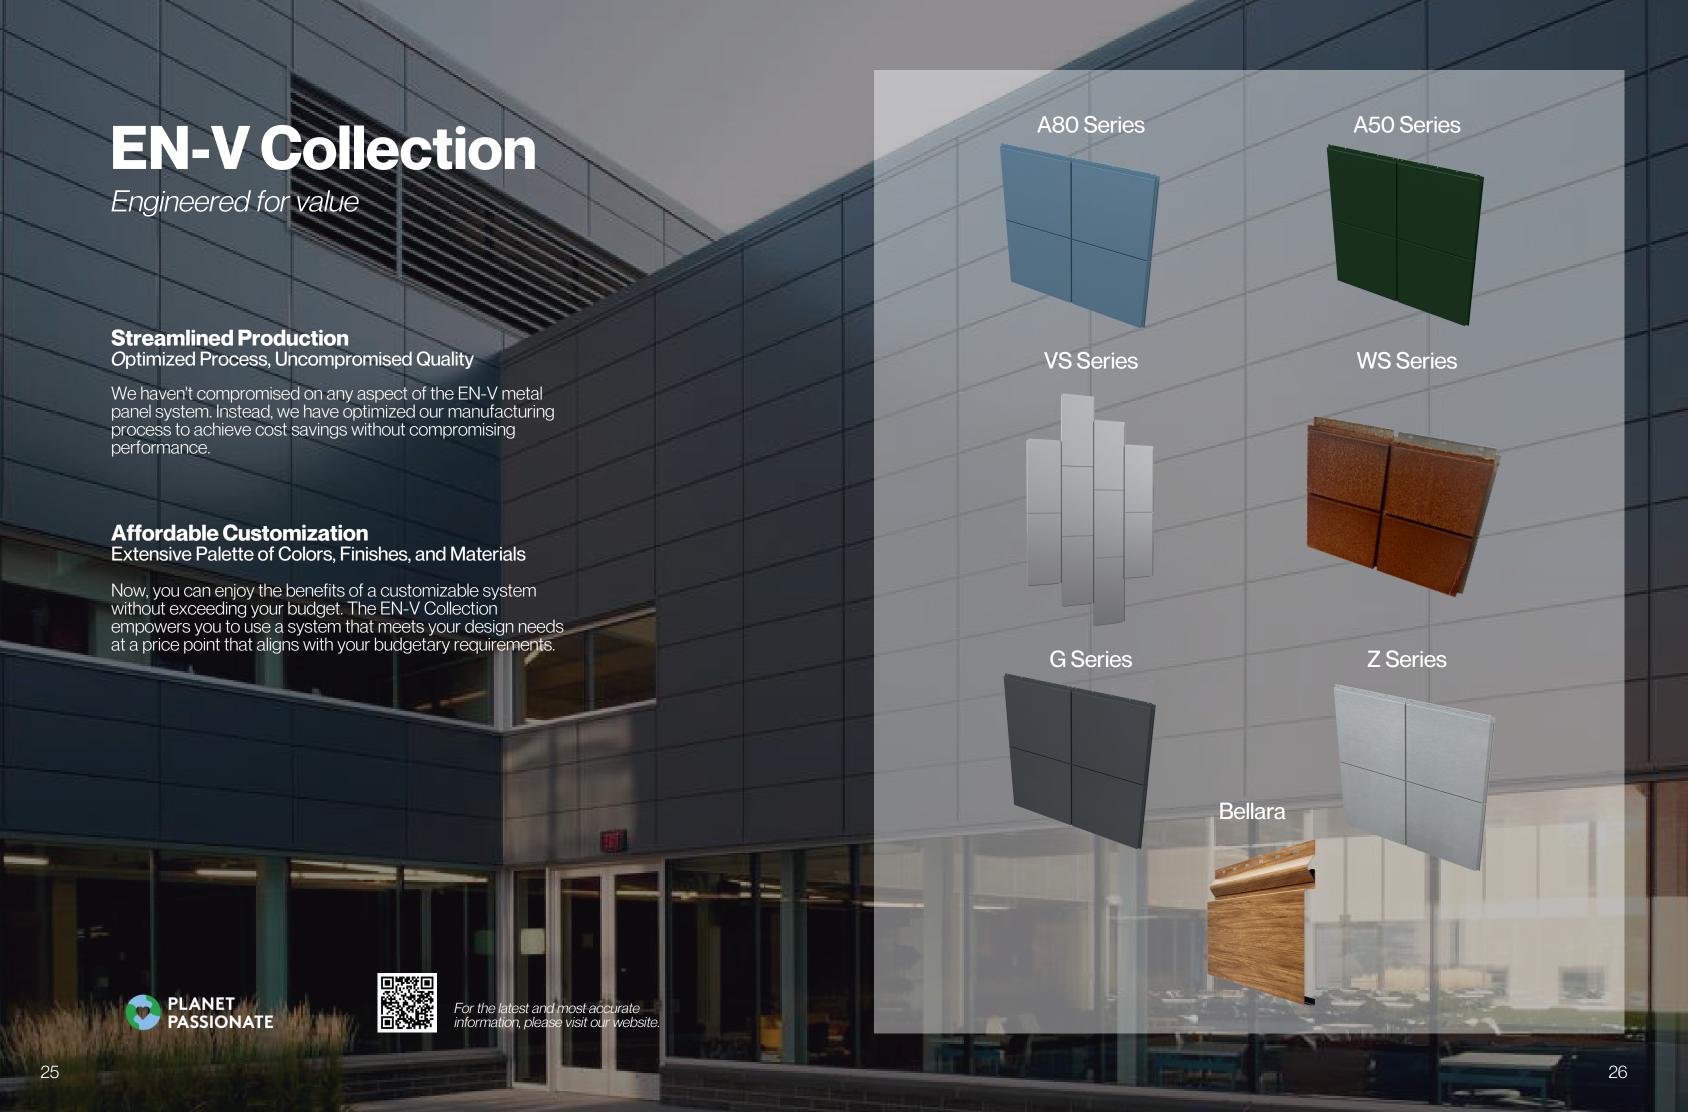

Size Limitations & Parameters: *EN-V Collection*

A80 Series


Available panel sizes

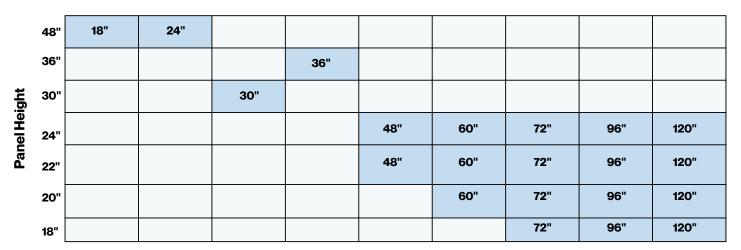

Panel Width

VS Series


Available panel sizes

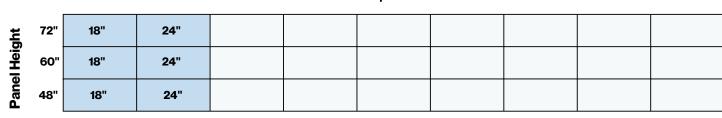

Panel Width

G Series


Available panel sizes

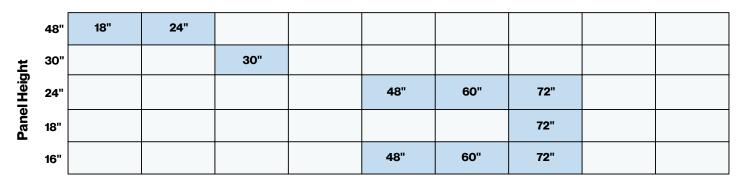

Panel Width


A50 Series

Available panel sizes




Quartz Z Series

Available panel sizes

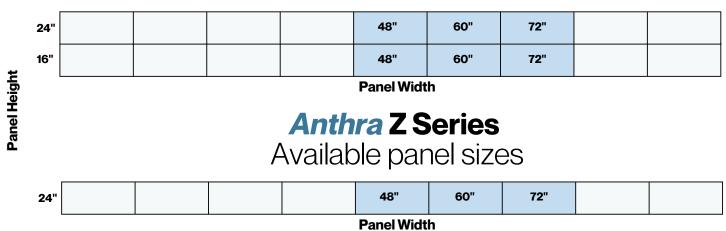

WS Series

Available panel sizes

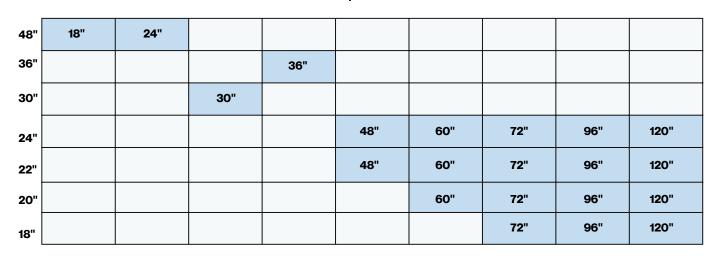

Panel Height

Panel Width


EN-V Attribute Comparison


Product Offering	Material	Thickness	Qty Sizes	Std. Colors	Premium Colors	Reveal Options	J Channel	Corner Trim	Flat Stock	Custom Trims	Other
A80	Aluminum	080"	21	22	4	Staggard Aligned	Extrusion	Extrusion	~	✓	Outside formed corner panels available in custom sizes (90-degree bend angle only)
A50	Aluminum	.050"	5	28	2	Staggard Aligned	Formed Sheet	Formed Sheet	✓	✓	Coil coated finish
G Series	Galvalume Steel	22 GA	10	4	N/A	Staggard Aligned	Formed Sheet	Formed Sheet	✓	✓	Paint is <i>Ultra-matte</i> finish
WS Series	Type 4 Weathering Steel	18 GA	15	N/A	N/A	Staggard Aligned	Formed Sheet	Formed Sheet	✓	✓	Weathering Steel may stain sidewalks and other building materials
Z Series	Zinc	1.0mm	9	2	N/A	Staggard Aligned	Formed Sheet	Formed Sheet	✓	✓	N/A
vs	Aluminum	080"	6	22	2	Staggard Aligned	Extrusion	Extrusion	✓	✓	Wind Clips Required ; Not compatible with horizontal EN-V A80 Series
Bellara	Galvanized Steel	26, 24 GA	3	17	N/A	N/A	Formed Sheet	Formed Sheet	✓	✓	12' Lengths, roll formed


Project Showcase





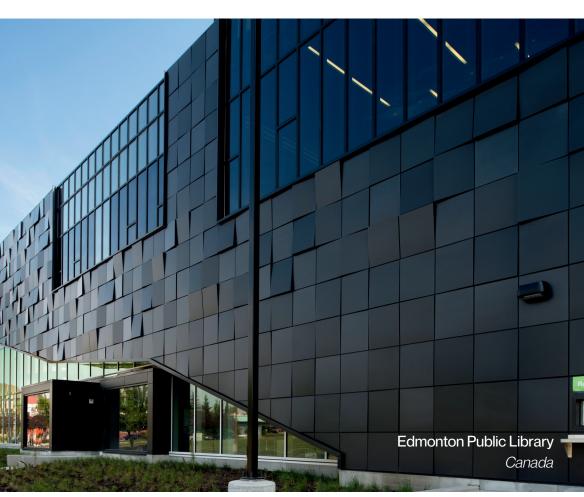

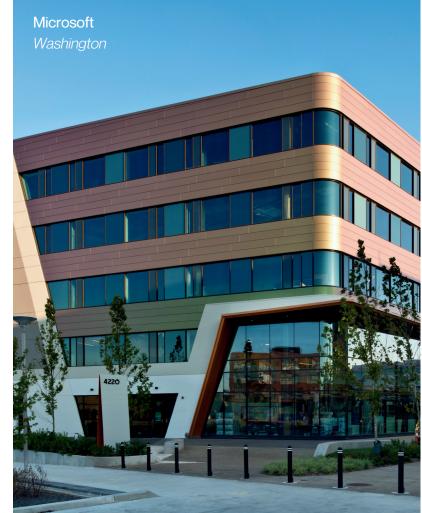

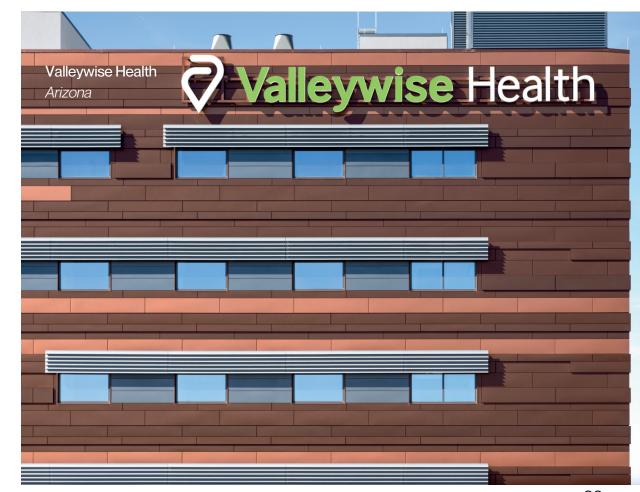

Project Showcase








Project Showcase



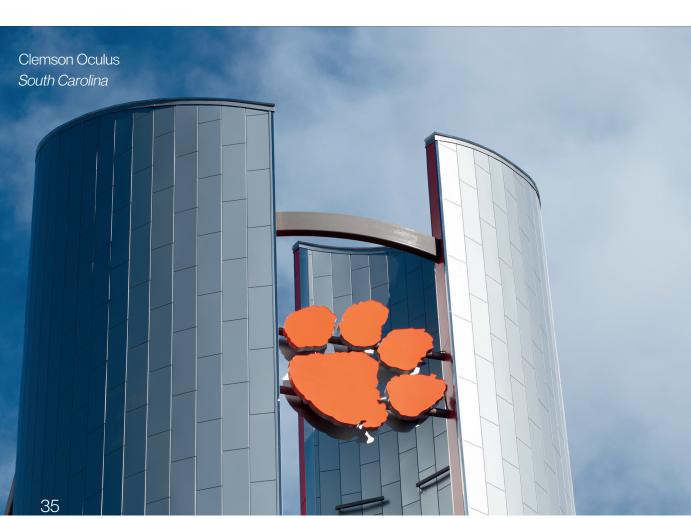





For the product offering in other markets please contact your local sales representative or visit www.dri-design.com.

To ensure you are viewing the most recent and accurate product information, please visit www.dri-design.com. Care has been taken to ensure that the contents of this publication are accurate, but Kingspan Limited and its subsidiary companies do not accept responsibility for errors or for information that is found to be misleading.

Suggestions for, or description of, the end use or application of products or methods of working are for information only and Dri-Design, Inc. accept no liability in respect thereof. Trademarks of the Dri-Design plc in the US, Canada and other countries.

© Dri-Design Inc., A Kingspan Group Company

